



DE5240BCR1D/2D

Barcode Card issuing machine for kiosk

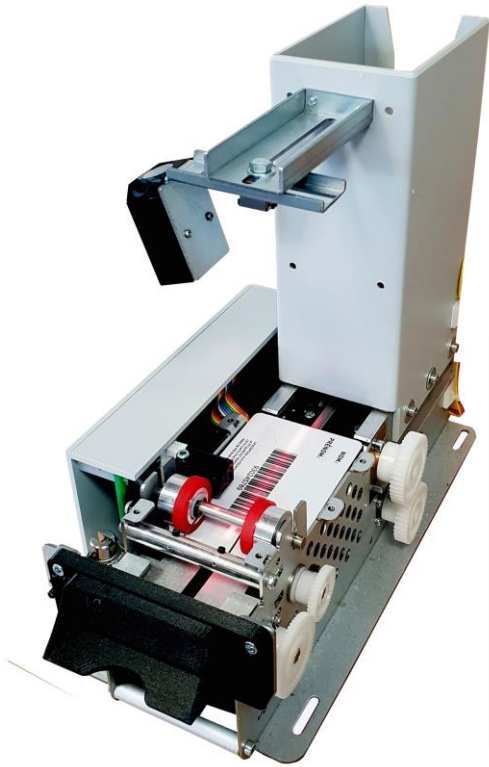

DE5240BCR1D

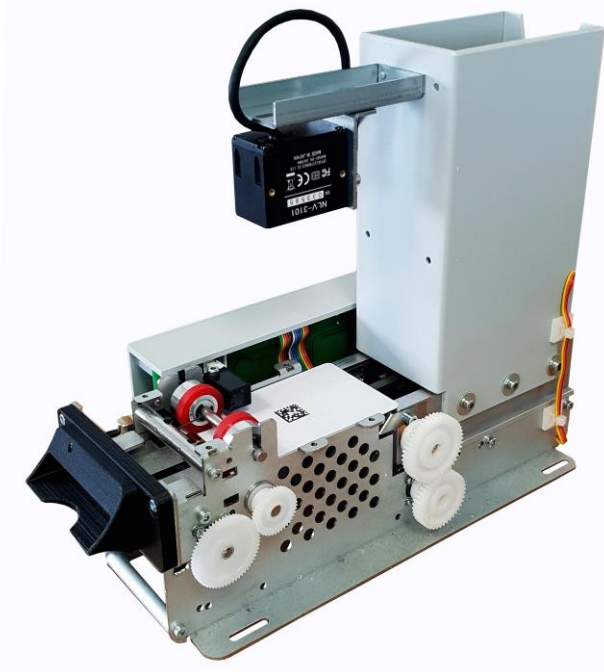

DE5240BCR2D

Specifically developed for kiosks, where a high level of reliability and durability is required. The card dispenser, based on a unique and reliable mechanism and completely frictionless, allows for a perfect operation without incident for 2 million runs. All of the precise parts for the mechanism are produced on machine tool.

Features:

- Card extraction from hopper, positioning under the barcode reader and reading.
- Frontal card presentation
- Internal card capture.
- Card acceptance, reading, the card can then be returned to the user or captured.
- Adjustable scanner positioning.

Applications

- Acces control
- Swimming pool ticketing
- Card parking system

Specifications

- Scanner 1D (DE5240BCR1D) or 2D (DE5240BCR2D) adjustable positioning.
- The smallest device on the market – only 10' deep
- LED display and shutter on the bezel, controlled by software
- pre empty card detection
- Accepts ISO-standard thickness plastic cards, 0.4 to 1mm
- Hopper capacity: 200 cards (thickness 0.75) option: 500 cards
- RS232c Interface
- Dimensions w: 117mm (4,61') h:221mm (8,70') d:252mm (10')
- Power supply: 24v DC +/- 10%
- In compliance with CE and RoHS standards.